

FINE series PURE UJR Fitting·Auto-Weld series



UJR



UJT-6.35M-AW-S



UJL-6.35M-AW-S

Excellent, Ultimate, Fine, Clean & Safe Technology

Fujikin Incorporated


Pursuing the Ultimate in Reliability: The *Fujikin*® UJR Series

The *Fujikin*® UJR gasket fitting series are high-performance, high-quality tube fittings. They are produced by making full use of design know-how and manufacturing technology Fujikin as accumulated throughout the years as an experienced precision fitting manufacturer.





The UJR gasket fitting series are precision union tube fittings that create a seal by welding the tube to the sleeve, interposing a metal gasket between the end sealing part and body sealing part of the sleeve, and tightening the union nut.



FITTING LIST

	Ultra-Compact Auto-Weld Short Sleeve.....	5
	Ultra-Compact Auto-Weld Short Sleeve.....	5
	Ultra-Compact Auto-Weld Short Sleeve.....	5
	Auto-Weld Sleeve	5
	Auto-Weld Sleeve	6
	Auto-Weld Sleeve	6
	Auto-Weld Reducing Sleeve.....	6
	Auto-Weld Reducing Sleeve.....	6
	Sleeve	7
	Reducing Sleeve	7
	Male Sleeve	7
	Reducing Male Sleeve.....	7
	Tube Adapter Sleeve.....	8
	Straight Union Body.....	8
	Reducing Straight Union Body.....	8



	Bulkhead Union Body 8		Tee Union Body 12		Union Nut 16
	Special Reducing Union Body 9		Cross Union Body 12		Long Union Nut 16
	Reducing Bulkhead Union Body 9		21.5MPa Double Sleeve 13		Coupling Body 16
	Finelok® Connector 9		1MPa Double Sleeve with Purering 13		Blind Sleeve 17
	Finelok® Bulkhead Connector 9		21.5MPa Double Sleeve with Purering 13		Cap Union Body 17
	Male Connector (R Thread) 10		Union Male Connector (R Thread) 13		OPTION Orifice-Type Straight Union Body 18
	Male Connector (NPT Thread) 10		Union Male Connector (NPT Thread) 14		OPTION Orifice-Type Gasket 18
	O-Ring Type Male Connector (UNF Thread) 10		Union Female Connector (G Thread) 14		OPTION High-Flow Type Reducing Sleeve 18
	O-Ring Type Male Connector (UNF Thread) 10		Union Female Connector (Rc Thread) 14		OPTION Nut For High-Flow Valve 18
	Female Connector (G Thread) 11		Union Female Connector (NPT Thread) 14		OPTION Coupling Body For High-Flow Type 18
	Female Connector (Rc Thread) 11		Gasket With Retainer 15		OPTION Plug Union 19
	Female Connector (NPT Thread) 11		Gasket 15		OPTION 1MPa Plug Union With Purering 19
	Male Elbow Union Body 11		Blind Gasket With Retainer 15		OPTION 16.2MPa Plug Union With Purering 19
	Male Elbow Body (R Thread) 12		Blind Gasket 15		OPTION 1/8 Sleeve 19
	Male Elbow (NPT Thread) 12		Purering 16		OPTION Ultra-Compact Auto-Weld Fitting -Special Sleeve 19

FEATURES

Sleeve

The tube size is indicated on the sleeve and can easily be confirmed at a glance

Union Nut

The nut threads are silver-plated to prevent galling

Gasket

Body


Seal End

Stable attachment / detachment and reliable sealing properties are achieved by means of a special hardening treatment.


SPECIFICATIONS AND MATERIALS

Specification	Design Pressure	21.5MPa (3,118 psi) (16.2 MPa (2,350 psi) for 12.7 nominal diameter) (10 MPa (1,450 psi) for 19.05 nominal diameter)
	Temperature Range	−196°C~+450°C (−320°F~+842°F)
Materials	Body, Sleeve	SUS316L (The material of body are SUS316.) (Double-melt, ultra-low Mn materials are available)
	Gasket	A total of four types are available: unplated stainless steel, unplated nickel, silver-plated stainless steel, and silver-plated nickel
	Nut	SUS316


Temperature/Pressure Rating

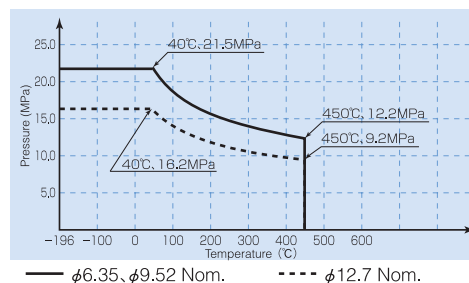


ASSEMBLY

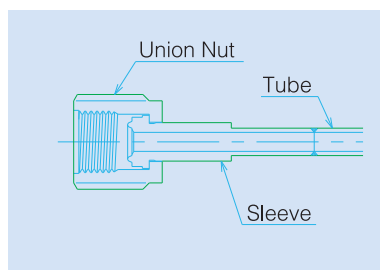


- The tube is welded to the sleeve while the union nut is attached to the sleeve.

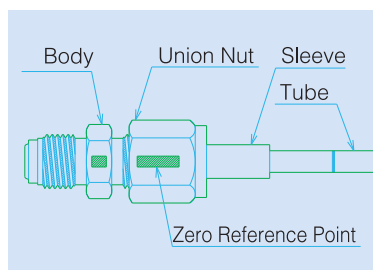

- Scribe a zero reference point on the body and union nut.

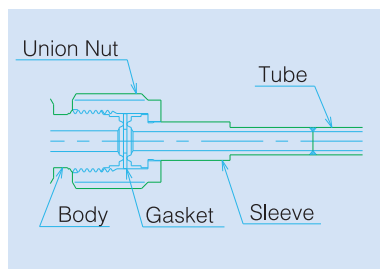

- Place the gasket between the end faces of the fitting body and sleeve (attached to the welded tube). Ensure that the body, gasket, and the sleeve are in firm contact. Manually tighten the union nut until it is finger-tight.

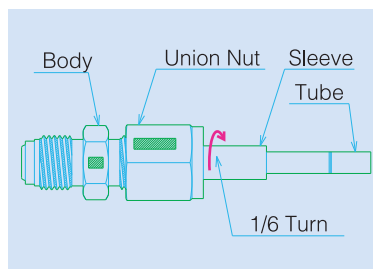

- Tighten the union nut with a wrench 1/6 turn beyond the zero reference point.

Assembly is complete!

Note: If the fitting must be removed and reassembled, please follow the above procedure for reassembly. If the above procedure was utilized for the initial tightening sequence, reliable integrity is assured. Please read these instructions carefully before assembly.

If the piping is subject to stress during assembly, hand-tightening will not assure sealing integrity. Tighten the nut with a wrench 1/6 turn after a sudden increase in torque is noticed.



PART NUMBERING DESIGNATION

UJR part numbers are defined below. Please specify the correct part number when inquiring.

Sleeve, Union Nut, and Gasket Part Number Designation

UJR - 6.35 MS - L18 - AW - S - 316LM - PS

Nominal
Diameter

Part
Name

Total Sleeve
Length

Auto-Weld

Weld Part Length
S : Short type
(Blank) : Long type

Material

Inner Surface
Treatment

◆Part Names

MS	Male Sleeve
N	Union Nut
S-W	Double Sleeve

B	Purering
G	Gasket

◆Materials

316LM	SUS316L double-melt, ultra-low Mn material
FS9	Ferrite-type special stainless steel
(Blank)	SUS316L single-melt

◆Inner Surface Treatment

UP	UP Treatment (Fujikin proprietary surface treatment)*
PS	Cr ₂ O ₃ Treatment

* As UP Treatment is standard for SS316LM materials, it is not shown as an option.

Body Part Number Designation

UJR - H - 6.35 B - UP

Connector Type

Nominal Diameter

Surface Treatment

◆Connector Type

F	Straight Union Body	H	Male Connector Body	HU	Union Male Connector Body
	Reducing Straight Union Body	G	Female Connector Body	GU	Union Female Connector Body
	Finelok Straight Union Body	L	Elbow Union Body	C	Coupling
P	Bulkhead Union Body		Male Elbow Union Body	JP	Plug Union
R	Reducing Body	T	Tee Union Body	JPB	Plug Union with Purering
RP	Reducing Bulkhead Union Body	X	Cross Union Body	JC	Cap Body
FP	Finelok Bulkhead Union Body				

◆Thread Size

TAPERED THREAD*	SPECIFICATION		A	B	C	D
	JIS B0203 (1982)	External	R1/8	R1/4	R3/8	R1/2
		Internal	Rc1/8	Rc1/4	Rc3/8	Rc1/2

*Thread specifications conform to JIS B0203 (1982) and JIS B0202 (1982).

TAPERED THREAD	SPECIFICATION	AN	BN	CN	DN
	ANSI B1.20.1	1/8NPT	1/4NPT	3/8NPT	1/2NPT


PARALLEL THREAD	SPECIFICATION	AF	BF	CF	DF
	JIS B0202(1981)	PF1/8	PF1/4	PF3/8	PF1/2
	JIS B0202(1982)	G1/8	G1/4	G3/8	G1/2

TUBING DIMENSIONS	TUBE NOMINAL DIAMETER	3.2 indicates 1/8 ^{OD}
		6.35 indicates 1/4 ^{OD}
		9.52 indicates 3/8 ^{OD}
		12.7 indicates 1/2 ^{OD}

You can download the latest catalogue from "<http://www.fujikin.co.jp/go/c72001e>"


(Unit : mm)

Ultra-Compact, Auto-Weld Short Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	15.2	6.35	UJR-6.35MS-AW-S

Ultra-Compact, Auto-Weld Short Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	18.2	6.35	UJR-6.35MS-L18-AW-S
9.52	9.52	7.4	20.3	19.3	6.35	UJR-9.52MS-L19-AW-S
9.52	12.7	10.3	20.3	19.3	6.35	UJR-12.7MS-L19-AW-S

Ultra-Compact, Auto-Weld Short Sleeve

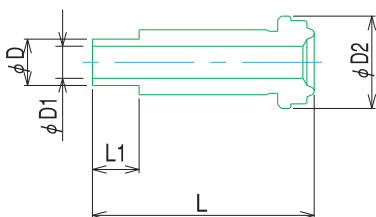

φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	33.5	6.35	UJR-6.35MS-L33-AW-S
9.52	9.52	7.4	20.3	37.5	6.35	UJR-9.52MS-L37-AW-S
9.52	12.7	10.3	20.3	37.5	6.35	UJR-12.7MS-L37-AW-S

Auto-Weld Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	28	19.05	UJR-6.35MS-L28-AW
9.52	9.52	7.4	20.3	28.45	19.05	UJR-9.52MS-L28.5-AW
9.52	12.7	10.3	20.3	28.45	19.05	UJR-12.7MS-L28.5-AW




(Unit : mm)

Auto-Weld Sleeve




φ Nom.	φD Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	31	19.05	UJR-6.35MS-L31-AW
9.52	9.52	7.4	20.3	32	19.05	UJR-9.52MS-L32-AW
9.52	12.7	10.3	20.3	32	19.05	UJR-12.7MS-L32-AW

Auto-Weld Sleeve

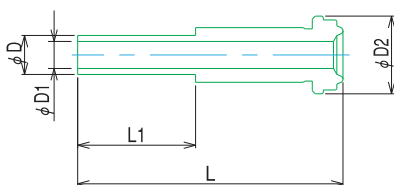


φ Nom.	φD Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.4	12.65	43.2	19.05	UJR-6.35MS-AW
9.52	9.52	7.4	20.3	45.45	19.05	UJR-9.52MS-AW
9.52	12.7	10.3	20.3	45.45	19.05	UJR-12.7MS-AW
19.05	19.05	16.57	29.1	51.5	19.05	UJR-19.05MS-AW

Auto-Weld Reducing Sleeve



φ Nom.	φD Nom.	φ D1	φ D2	φ D3	L	L1	Part Number
9.52	6.35	4.4	15.1	20.3	28.45	19.05	UJR-9.52×6.35MS-L28.5-AW


Auto-Weld Reducing Sleeve

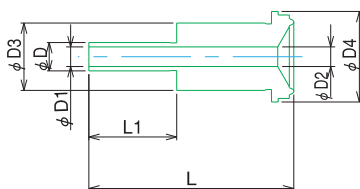

φ Nom.	φD Nom.	φ D1	φ D2	φ D3	φ D4	L	L1	Part Number
9.52	6.35	4.4	4.4	15.1	20.3	45.5	19.05	UJR-9.52×6.35MS-AW
19.05	6.35	4.4	16.57	22.2	29.1	51.5	19.05	UJR-19.05×6.35MS-AW
19.05	9.52	7.4	16.57	22.2	29.1	51.5	19.05	UJR-19.05×9.52MS-AW


(Unit : mm)

Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
3.2	3.2	5	6.4	18	2.6	UJR-3.2S
6.35	6.35	8.9	12.65	33.5	7.2	UJR-6.35S
9.52	9.52	15.1	20.3	38	7.9	UJR-9.52S
9.52	12.7	15.1	20.3	38	9.7	UJR-12.7S
19.05	19.05	22.2	29.1	50.8	11.1	UJR-19.05S

Reducing Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	φ D3	L	L1	Part Number
6.35	3.2	8.9	2.5	12.65	33.5	3	UJR-6.35×3.2S
9.52	6.35	15.1	4.8	20.3	38	7.2	UJR-9.52×6.35S

Male Sleeve



φ Nom.	φ D Nom.	φ D1	φ D2	φ D3	φ D4	L	L1	Part Number
3.2	3.2	1.3	2.5	5	6.4	18	7.2	UJR-3.2MS
6.35	6.35	3.3	4.8	8.9	12.65	33.5	10.5	UJR-6.35MS
9.52	9.52	7.2	7.2	15.1	20.3	38	10.5	UJR-9.52MS
9.52	12.7	10.4	10.4	15.1	20.3	38	12.7	UJR-12.7MS

Reducing Male Sleeve




φ Nom.	φ D Nom.	φ D1	φ D2	φ D3	φ D4	L	L1	Part Number
6.35	3.2	4.8	2.3	8.9	12.65	33.5	7.2	UJR-6.35×3.2MS
9.52	6.35	7.2	3	15.1	20.3	38	10.5	UJR-9.52×6.35MS




(Unit : mm)

Tube Adapter Sleeve

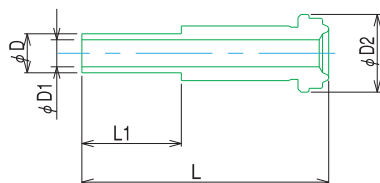


φ Nom.	φ D Nom.	φ D1	φ D2	L	L1	Part Number
6.35	6.35	4.5	12.65	41	16	UJR-F6.35S
9.52	9.52	7	20.3	46	18	UJR-F9.52S
9.52	12.7	10	20.3	48.5	24.5	UJR-F12.7S

Straight Union Body




φ Nom.	A	φ D	B	L	Part Number
3.2	5/16-24UNF	2.5	10	27.5	UJR-F-3.2
6.35	9/16-18UNF	4.8	17	39	UJR-F-6.35
9.52	7/8-14UNF	10.4	23	46	UJR-F-9.52
19.05	1 1/4-18UNEF	15.9	36	60.5	UJR-F-19.05

Reducing Straight Union Body



φ Nom.	φ Nom.	A	A1	φ D	B	L	Part Number
6.35	3.2	9/16-18UNF	5/16-24UNF	2.5	17	35	UJR-F-6.35×3.2
9.52	6.35	7/8-14UNF	9/16-18UNF	4.8	23	44	UJR-F-9.52×6.35


Bulkhead Union Body



φ Nom.	A	Panel Hole Dia	φ D	B	B1	L	L1	Part Number
6.35	9/16-18UNF	14.3	4.8	19	19	55	32	UJR-P-6.35
9.52	7/8-14UNF	22.3	10.4	26	26	63.5	36.5	UJR-P-9.52
19.05	1 1/4-18UNEF	31.8	15.9	38	38	88	50	UJR-P-19.05


(Unit : mm)

Special Reducing Union Body

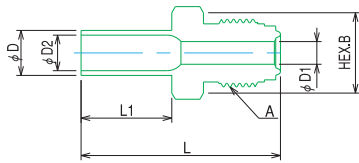


φ Nom.	φ D Nom.	A	φ D1	φ D2	L	L1	B	Part Number
6.35	9.52	9/16-18UNF	4.8	7.52	42.05	19.05	17	UJR-R-6.35×9.52M

Reducing Bulkhead Union Body




φ Nom.	φ D Nom.	φ D1	A	Panel Hole Dia	L	L1	L2	B	B1	Part Number
6.35	6.35	4.4	9/16-18UNF	14.3	57.8	32	19.05	19	19	UJR-RP-6.35×6.35M-AW
9.52	9.52	7.4	7/8-14UNF	22.3	64.3	36.5	19.05	26	26	UJR-RP-9.52×9.52M-AW

Finelok® Connector



φ Nom.	φ D Nom.	A	φ D1	B	B1	L	L1	L2	Part Number
6.35	3.2	9/16-18UNF	2.7	17	10	38	31.5	13	UJR-F-6.35×F3.2
6.35	6.35	9/16-18UNF	4.8	17	14	40	33	15	UJR-F-6.35×F6.35
9.52	6.35	7/8-14UNF	5	23	14	44	37	15	UJR-F-9.52×F6.35
9.52	9.52	7/8-14UNF	7.2	23	17	46	38	17.5	UJR-F-9.52×F9.52
9.52	12.7	7/8-14UNF	10.4	23	22	50	39	24	UJR-F-9.52×F12.7

Finelok® Bulkhead Connector




φ Nom.	φ D Nom.	A	Panel Hole Dia	φ D1	B	B1	B2	L	L1	L2	L3	Part Number
6.35	6.35	9/16-18UNF	11.2	4.8	17	14	14	56	49	33	15	UJR-FP-F6.35×6.35
9.52	9.52	7/8-14UNF	14.3	7.5	23	17	19	64	56	37	17.5	UJR-FP-F9.52×9.52
9.52	12.7	7/8-14UNF	19.1	10.4	23	22	23	69	58	40.5	24	UJR-FP-F12.7×9.52




(Unit : mm)

Male Connector (R Thread)




φ Nom.	A	A1	φ D	B	L	Part Number
3.2	R1/8	5/16-24UNF	2.5	12	26	UJR-H-3.2A
6.35	R1/8	9/16-18UNF	4.8	17	33	UJR-H-6.35A
6.35	R1/4	9/16-18UNF	4.8	17	36	UJR-H-6.35B
6.35	R3/8	9/16-18UNF	4.8	17	38	UJR-H-6.35C
9.52	R1/4	7/8-14UNF	7.2	23	40	UJR-H-9.52B
9.52	R3/8	7/8-14UNF	9.7	23	41	UJR-H-9.52C
9.52	R1/2	7/8-14UNF	10.4	23	45	UJR-H-9.52D

Male Connector (NPT Thread)




φ Nom.	A	A1	φ D	B	L	Part Number
3.2	1/8NPT	5/16-24UNF	2.5	12	26	UJR-H-3.2AN
6.35	1/8NPT	9/16-18UNF	4.8	17	33	UJR-H-6.35AN
6.35	1/4NPT	9/16-18UNF	4.8	17	36	UJR-H-6.35BN
9.52	1/4NPT	7/8-14UNF	7.2	23	40	UJR-H-9.52BN
9.52	3/8NPT	7/8-14UNF	9.7	23	41	UJR-H-9.52CN
9.52	1/2NPT	7/8-14UNF	10.4	23	45	UJR-H-9.52DN

O-Ring Type Male Connector (UNF Thread)




φ Nom.	A	A1	φ D	B	L	L1	O-Ring (ARP)	Part Number
6.35	7/16-20UNF	9/16-18UNF	4.8	17	33	9.2	904	UJR-H-6.35×7/16-20-OS
6.35	9/16-18UNF	9/16-18UNF	4.8	21	33.5	10	906	UJR-H-6.35×9/16-18-OS
9.52	9/16-18UNF	7/8-14UNF	7.2	23	37.5	10	906	UJR-H-9.52×9/16-18-OS
9.52	3/4-16UNF	7/8-14UNF	7.2	23	40.2	11.2	908	UJR-H-9.52×3/4-16-OS
9.52	7/8-14UNF	7/8-14UNF	7.2	26	42	13	910	UJR-H-9.52×7/8-14-OS

O-Ring Type Male Connector (UNF Thread)




φ Nom.	A	A1	φ D	B	L	L1	O-Ring (JIS)	Part Number
6.35	PF1/4	9/16-18UNF	4.8	23	36.3	10	P15	UJR-H-6.35BF-OR
6.35	7/16-20UNF	9/16-18UNF	4.8	19	37.3	10.5	P12.5	UJR-H-6.35×7/16-20-OR
9.52	9/16-18UNF	7/8-14UNF	7.5	26	41.3	12	P18	UJR-H-9.52×9/16-18-OR

Female Connector (G Thread)




φ Nom.	A	A1	φ D	φ D1	B	L	Part Number
3.2	G1/8	5/16-24UNF	2.5	5.5	14	30	UJR-G-3.2AF
6.35	G1/4	9/16-18UNF	4.8	5.5	19	36	UJR-G-6.35BF
6.35	G3/8	9/16-18UNF	4.8	5.5	21	39	UJR-G-6.35CF
9.52	G3/8	7/8-14UNF	5.5	5.5	23	41	UJR-G-9.52CF
9.52	G1/2	7/8-14UNF	5.5	5.5	26	48	UJR-G-9.52DF

Female Connector (Rc Thread)




φ Nom.	A	A1	φ D	B	L	Part Number
3.2	Rc1/8	5/16-24UNF	2.5	14	30	UJR-G-3.2A
6.35	Rc1/8	9/16-18UNF	4.8	19	36	UJR-G-6.35A
6.35	Rc1/4	9/16-18UNF	4.8	19	36	UJR-G-6.35B
9.52	Rc3/8	7/8-14UNF	10.4	23	41	UJR-G-9.52C
9.52	Rc1/2	7/8-14UNF	10.4	26	48	UJR-G-9.52D

Female Connector (NPT Thread)



φ Nom.	A	A1	φ D	B	L	Part Number
3.2	1/8NPT	5/16-24UNF	2.5	14	30	UJR-G-3.2AN
6.35	1/4NPT	9/16-18UNF	4.8	19	36	UJR-G-6.35BN
9.52	3/8NPT	7/8-14UNF	10.4	23	41	UJR-G-9.52CN
9.52	1/2NPT	7/8-14UNF	10.4	26	48	UJR-G-9.52DN

Elbow Union Body




φ Nom.	A	φ D	L	Part Number
3.2	5/16-24UNF	2.5	19.5	UJR-L-3.2
6.35	9/16-18UNF	4.8	29	UJR-L-6.35
9.52	7/8-14UNF	10.4	33.5	UJR-L-9.52




(Unit : mm)

Male Elbow Body (R Thread)




ϕ Nom.	A	A1	ϕ D	ϕ D1	L	L1	Part Number
6.35	R1/8	9/16-18UNF	4.8	4.8	29	23	UJR-L-6.35A
6.35	R1/4	9/16-18UNF	4.8	4.8	29	26	UJR-L-6.35B
9.52	R1/4	7/8-14UNF	9.7	7.5	33.5	29	UJR-L-9.52B
9.52	R3/8	7/8-14UNF	9.7	9.7	33.5	30	UJR-L-9.52C
9.52	R1/2	7/8-14UNF	10.4	10.4	33.5	33	UJR-L-9.52D

Male Elbow Body (NPT Thread)




ϕ Nom.	A	A1	ϕ D	ϕ D1	L	L1	Part Number
6.35	1/8NPT	9/16-18UNF	4.8	4.8	29	23	UJR-L-6.35AN
6.35	1/4NPT	9/16-18UNF	4.8	4.8	29	26	UJR-L-6.35BN
9.52	1/4NPT	7/8-14UNF	9.7	7.5	33.5	29	UJR-L-9.52BN
9.52	3/8NPT	7/8-14UNF	9.7	9.7	33.5	30	UJR-L-9.52CN
9.52	1/2NPT	7/8-14UNF	10.4	10.4	33.5	33	UJR-L-9.52DN

Tee Union Body



ϕ Nom.	A	ϕ D	L	L1	L2	Part Number
3.2	5/16-24UNF	2.5	39	19.5	19.5	UJR-T-3.2
6.35	9/16-18UNF	4.8	58	29	29	UJR-T-6.35
9.52	7/8-14UNF	10.4	67	33.5	33.5	UJR-T-9.52


Cross Union Body

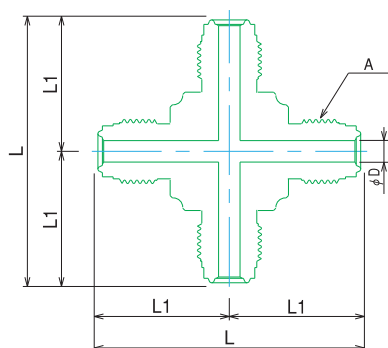

ϕ Nom.	A	ϕ D	L	L1	Part Number
3.2	5/16-24UNF	2.5	39	19.5	UJR-X-3.2
6.35	9/16-18UNF	4.8	58	29	UJR-X-6.35
9.52	7/8-14UNF	10.4	67	33.5	UJR-X-9.52


(Unit : mm)

21.5 MPa (3,118 psi) Double Sleeve

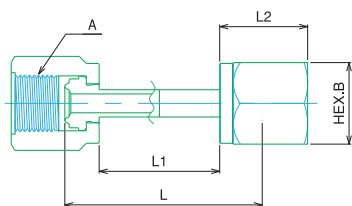


ϕ Nom.	A	B	L	L1	L2	Part Number
6.35	9/16-18UNF	19	43.7	28.1	20.5	UJR-6.35S-W
9.52	7/8-14UNF	26	47.6	30.6	22.4	UJR-9.52S-W

1 MPa (145 psi) Double Sleeve

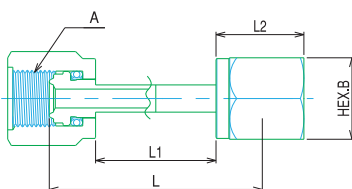


ϕ Nom.	A	B	L	L1	L2	Part Number
6.35	9/16-18UNF	19	49.7	28.1	20.5	UJR-6.35S-W-BR
9.52	7/8-14UNF	26	55	30.6	22.4	UJR-9.52S-W-BR

21.5 (3,118 psi) MPa Double Sleeve

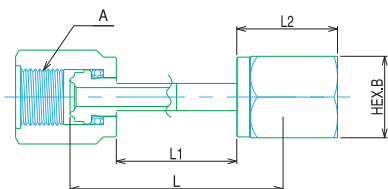

ϕ Nom.	A	B	L	L1	L2	Part Number
6.35	9/16-18UNF	19	49.7	28.1	23.3	UJR-6.35S-W-L-BR
9.52	7/8-14UNF	26	55	30.6	26	UJR-9.52S-W-L-BR

Union Male Connector (R Thread)




ϕ Nom.	A	A1	ϕ D	B	B1	L	L1	L2	Part Number
6.35	R1/8	9/16-18UNF	4.35	17	19	51.7	38.5	22.5	UJR-HU-6.35A-IAE
6.35	R1/4	9/16-18UNF	4.35	17	19	54.7	41.5	22.5	UJR-HU-6.35B-IAE
9.52	R3/8	7/8-14UNF	7.3	19	26	61.7	46.5	25.5	UJR-HU-9.52C-IAE
9.52	R1/2	7/8-14UNF	7.3	23	26	65.7	50.5	25.5	UJR-HU-9.52D-IAE




(Unit : mm)

Union Male Connector (NPT Thread)




φNom.	A	A1	φD	B	B1	L	L1	L2	Part Number
6.35	1/8NPT	9/16-18UNF	4.35	17	19	51.7	38.5	22.5	UJR-HU-6.35AN-IAE
6.35	1/4NPT	9/16-18UNF	4.35	17	19	54.7	41.5	22.5	UJR-HU-6.35BN-IAE
9.52	3/8NPT	7/8-14UNF	7.3	19	26	61.7	46.5	25.5	UJR-HU-9.52CN-IAE
9.52	1/2NPT	7/8-14UNF	7.3	23	26	65.7	50.5	25.5	UJR-HU-9.52DN-IAE

Union Female Connector (G Thread)




φNom.	A	A1	φD	φD1	B	B1	L	L1	L2	Part Number
6.35	G1/8	9/16-18UNF	4.35	5.5	17	19	51.7	38.5	22.5	UJR-GU-6.35AF-IAE
6.35	G1/4	9/16-18UNF	4.35	5.5	19	19	54.7	41.5	22.5	UJR-GU-6.35BF-IAE
9.52	G3/8	7/8-14UNF	7.3	5.5	23	26	61.7	46.5	25.5	UJR-GU-9.52CF-IAE
9.52	G1/2	7/8-14UNF	7.3	5.5	26	26	65.7	50.5	25.5	UJR-GU-9.52DF-IAE

Union Female Connector (Rc Thread)




φNom.	A	A1	φD	B	B1	L	L1	L2	Part Number
6.35	Rc1/8	9/16-18UNF	4.35	17	19	51.7	38.5	22.5	UJR-GU-6.35A-IAE
6.35	Rc1/4	9/16-18UNF	4.35	19	19	54.7	41.5	22.5	UJR-GU-6.35B-IAE
9.52	Rc3/8	7/8-14UNF	7.3	23	26	61.7	46.5	25.5	UJR-GU-9.52C-IAE
9.52	Rc1/2	7/8-14UNF	7.3	26	26	65.7	50.5	25.5	UJR-GU-9.52D-IAE

Union Female Connector (NPT Thread)



φNom.	A	A1	φD	B	B1	L	L1	L2	Part Number
6.35	1/8NPT	9/16-18UNF	4.35	17	19	51.7	38.5	22.5	UJR-GU-6.35AN-IAE
6.35	1/4NPT	9/16-18UNF	4.35	19	19	54.7	41.5	22.5	UJR-GU-6.35BN-IAE
9.52	3/8NPT	7/8-14UNF	7.3	23	26	61.7	46.5	25.5	UJR-GU-9.52CN-IAE
9.52	1/2NPT	7/8-14UNF	7.3	26	26	65.7	50.5	25.5	UJR-GU-9.52DN-IAE


Gasket with Retainer

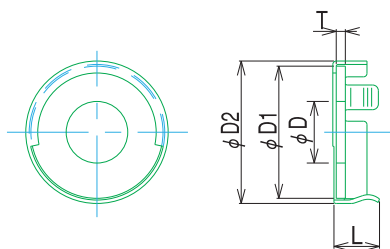

ϕ Nom.	ϕ D	ϕ D1	ϕ D2	L	T	Material	Part Number
6.35	5.5	11.8	12.6	4	0.8	SUS316L (Double-Melt)	UJR-6.35RE-RG-O
9.52	11	19.2	20	4.6	0.8	SUS316L (Double-Melt)	UJR-9.52RE-RG-O
6.35	5.5	11.8	12.6	4	0.8	Nickel	UJR-6.35RE-RG-NI-O
9.52	11	19.2	20	4.6	0.8	Nickel	UJR-9.52RE-RG-NI-O

The "O" designation at the end of the part number is eliminated if silver plating is required.


Gasket

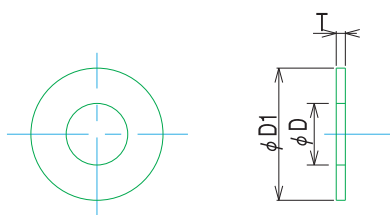

ϕ Nom.	ϕ D	ϕ D1	T	Material	Part Number
6.35	5.5	12.4	0.8	SUS316L (Double-Melt)	UJR-6.35G-O
9.52	11	19.8	0.8	SUS316L (Double-Melt)	UJR-9.52G-O
3.2	2.3	6.4	0.5	Nickel	UJR-3.2G-NI-O
6.35	5.5	12.4	0.8	Nickel	UJR-6.35G-NI-O
9.52	11	19.8	0.8	Nickel	UJR-9.52G-NI-O
19.05	17	28.5	0.8	Nickel	UJR-19.05G-NI-O

The "O" designation at the end of the part number is eliminated if silver plating is required.


Blind Gasket with Retainer

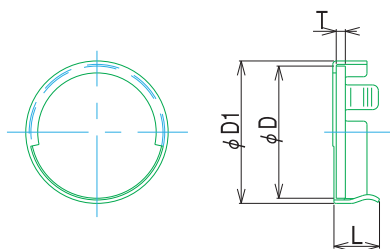

ϕ Nom.	ϕ D	ϕ D1	L	T	Material	Part Number
6.35	11.8	12.6	4	0.8	SUS316L (Double-Melt)	UJR-6.35RE-RG-O-BL
9.52	19.2	20	4.6	0.8	SUS316L (Double-Melt)	UJR-9.52RE-RG-O-BL
6.35	11.8	12.6	4	0.8	Nickel	UJR-6.35RE-RG-NI-O-BL
9.52	19.2	20	4.6	0.8	Nickel	UJR-9.52RE-RG-NI-O-BL

The "O" designation at the end of the part number is eliminated if silver plating is required.

Blind Gasket

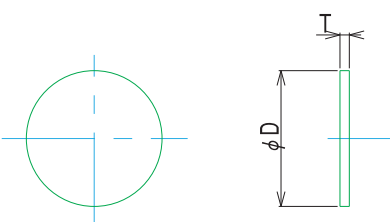


ϕ Nom.	ϕ D	T	Material	Part Number
6.35	12.4	0.8	SUS316L (Double-Melt)	UJR-6.35G-O-BL
9.52	19.8	0.8	SUS316L (Double-Melt)	UJR-9.52G-O-BL
3.2	6.4	0.5	Nickel	UJR-3.2G-NI-O-BL
6.35	12.4	0.8	Nickel	UJR-6.35G-NI-O-BL
9.52	19.8	0.8	Nickel	UJR-9.52G-NI-O-BL

The "O" designation at the end of the part number is eliminated if silver plating is required.




Purering




ϕ Nom.	ϕ D	ϕ D1	L	Part Number
6.35	9.1	12.6	2.8	UJR-6.35B
9.52	15.3	20.3	3.5	UJR-9.52B

Union Nut




ϕ Nom.	A	ϕ D	B	L	Part Number
3.2	5/16-24UNF	5.2	10	13.5	UJR-3.2N
6.35	9/16-18UNF	9.1	19	20.5	UJR-6.35N
9.52	7/8-14UNF	15.3	26	22.4	UJR-9.52N
19.05	1 1/4-14UNEF	22.3	38	29	UJR-19.05N

Long Union Nut



ϕ Nom.	A	ϕ D	B	L	Part Number
6.35	9/16-18UNF	9.1	19	23.3	UJR-6.35N-L
9.52	7/8-14UNF	15.3	26	26	UJR-9.52N-L


Coupling



ϕ Nom.	A	ϕ D	B	L	Part Number
3.2	5/16-24UNF	5.2	10	12.7	UJR-C-3.2
6.35	9/16-18UNF	9.1	17	18.2	UJR-C-6.35
9.52	7/8-14UNF	15.3	23	20.5	UJR-C-9.52
19.05	1 1/4-18UNEF	22.5	36	25.5	UJR-C-19.05


(Unit : mm)

Blind Sleeve

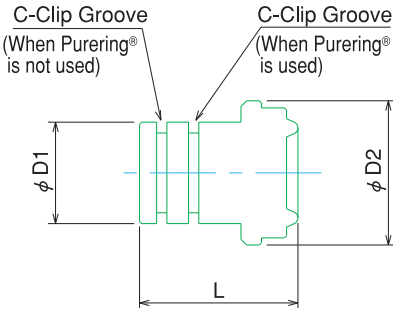

ϕ Nom.	$\phi D1$	$\phi D2$	L	C-Clip	Part Number
6.35	8.9	12.65	13.9	$\phi 7$	UJR-6.35S-BL
9.52	15.1	20.3	16.2	$\phi 12$	UJR-9.52S-BL

Cap Union Body




ϕD Nom.	A	B	L	Part Number
3.2	5/16-24UNF	10	17	UJR-JC-3.2
6.35	9/16-18UNF	17	23	UJR-JC-6.35
9.52	7/8-14UNF	23	27	UJR-JC-9.52
19.05	1 1/4-18UNEF	36	38	UJR-JC-19.05



OPTIONS

(Unit : mm)


Orifice-Type Straight Union Body

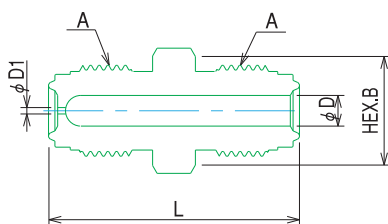


ϕ Nom.	ϕ D	ϕ D1	A	L	B	Part Number
6.35	4.8	*	9/16-18UNF	39	17	UJR-F-6.35-*

* Orifice Sizes: 0.1, 0.2, 0.3, 0.4 and 0.5 available.

Orifice-Type Gasket




ϕ Nom.	ϕ D	Material	Part Number
6.35	*	SUS316L (double-melt)	UJR-6.35G-O-*
		Nickel	UJR-6.35G-NI-O-*
9.52	*	SUS316L (double-melt)	UJR-9.52G-O-*
		Nickel	UJR-9.52G-NI-O-*



ϕ Nom.	ϕ D	Material	Part Number
6.35	*	SUS316L (double-melt)	UJR-6.35RE-RG-O-*
		Nickel	UJR-6.35RE-RG-NI-O-*
9.52	*	SUS316L (double-melt)	UJR-9.52RE-RG-O-*
		Nickel	UJR-9.52RE-RG-NI-O-*


* Orifice Sizes: 0.1, 0.2, 0.3, 0.4 and 0.5 available.

High-Flow Reducing Sleeve

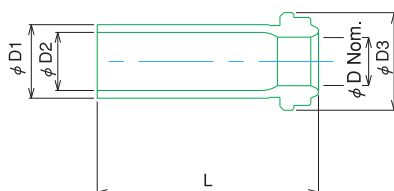


ϕ D Nom.	ϕ D1	ϕ D2	L	ϕ D3	品番
6.35	9.52	7.4	28.5	12.65	UJR-6.35×9.52MS-L28.5-APM
6.35	9.52	7.4	33	12.65	UJR-6.35×9.52MS-L33-APN

High-Flow Nut



ϕ Nom.	A	ϕ D	B	L	Part Number
6.35	9/16-18UNF	9.7	19	20.5	UJR-6.35×9.52N

High-Flow Coupling Body




ϕ Nom.	A	ϕ D	B	L	Part Number
6.35	9/16-18UNF	9.7	17	18.2	UJR-C-6.35×9.52

OPTIONS


(Unit : mm)

Plug Union




ϕ Nom.	A	B	L	L1	C-Clip	Part Number
6.35	9/16-18UNF	19	26.4	20.5	$\phi 7$	UJR-JP-6.35
9.52	7/8-14UNF	26	30.3	22.4	$\phi 12$	UJR-JP-9.52

1 MPa (145 psi) Plug Union with Purering




ϕ Nom.	A	B	L	L1	C-Clip	Part Number
6.35	9/16-18UNF	19	23.6	20.5	$\phi 7$	UJR-JPB-6.35-DMJ
9.52	7/8-14UNF	26	26.7	22.4	$\phi 12$	UJR-JPB-9.52-DMJ

21.5 MPa (3,118 psi) Plug Union with Purering




ϕ Nom.	A	B	L	L1	C-Clip	Part Number
6.35	9/16-18UNF	19	26.4	23.3	$\phi 7$	UJR-JPB-6.35
9.52	7/8-14UNF	26	30.3	26	$\phi 12$	UJR-JPB-9.52

1/8 Sleeve



ϕ Nom.	ϕD Nom.	$\phi D1$	$\phi D2$	L	L1	Part Number
3.2	3.2	1.8	6.4	22.7	6.35	UJR-3.2MS-AW-S-EAJ

Ultra-Compact Auto-Weld Fitting - Special Sleeve

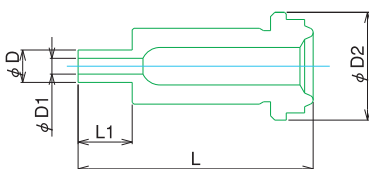

ϕ Nom.	ϕD Nom.	$\phi D1$	$\phi D2$	L	L1	Part Number
6.35	3.2	1.8	12.65	33.5	6.35	UJR-6.35x3.2MS-AW-SEAJ

[illegible]

Pursuing the Ultimate in Reliability: The **Fujikin**® Auto-Weld Series

The **Fujikin**® auto-weld fitting series are high-performance, high-quality tube fittings. They are produced by making full use of design know-how and manufacturing technology Fujikin has accumulated throughout the years as an experienced precision fitting manufacturer.

By utilizing Fujikin's unique know-how through years of actual performance data with automatic welding machines, reliable and stable weld quality is achieved through precise weld thickness design.



Fujikin Incorporated

FITTING LIST

	Ultra-Compact Auto Weld Fitting - Elbow	23
	Ultra-Compact Auto Weld Fitting - Reducing Elbow	23
	Ultra-Compact Auto Weld Fitting - Tee	23
	Ultra-Compact Auto Weld Fitting - Reducing Tee	23
	Ultra-Compact Auto Weld Fitting - Cross	24
	Ultra-Compact Auto Weld Fitting - Tribow	24
	Ultra-Compact Auto Weld Fitting - Reducer	24
	Auto Weld Fitting - Elbow	24
	Auto Weld Fitting - Reducing Elbow	25
	Auto Weld Fitting - Tee	25
	Auto Weld Fitting - Reducing Tee	25
	Auto Weld Fitting - Reducing Straight	25
	Auto Weld Fitting - Special Elbow	25
	Auto Weld Fitting - Special Tee	26
	Auto Weld Fitting - Special Tee	26
	Auto-Weld Fitting - Elbow (1/8" OD)	26
	Auto-Weld Fitting - Tee (1/8" OD)	26
	Ultra-Compact Auto-Weld Fitting - Reducer (1/8" OD)	26



FEATURES

- Designed with special consideration of dimensional tolerances and precision for use in automatic welding equipment.
- Two series of weld fittings are manufactured so as to fit nearly all automatic welding machines.
- The inner surface undergoes an ultra-precision finishing treatment. UP Treatment (Fujikin proprietary special treatment) is also optionally employed.
- SUS316L and SUS316L double-melt, ultra-low Mn is the standard material for auto-weld fittings due to its excellent corrosion resistance after welding.
- Cr₂O₃ may be optionally performed as special inner-surface treatments.
- Welded areas can also be optionally made using FS9 - which is 100% Cr₂O₃ treatable.

PART NUMBER DESIGNATION

Auto-weld part numbers are defined below. Please specify the correct part number when inquiring.

Auto-Weld Fitting Part Number Designation

UJ **T** - **6.35** **M** - **AW** - **S** - **316LM** - **PS**

Fitting Type Nominal Diameter Auto-Weld Welded Part Length
 S: Short Type
 (Blank): Long Type Material Inner Surface Treatment

◆Fitting Type

L	Elbow
T	Tee
X	Cross

LT	Tribow
S	Reducer

◆Nominal Diameter

6.35 indicates 1/4" OD

9.52 indicates 3/8" OD

12.7 indicates 1/2" OD

◆Materials

316LM SUS316L double-melt, ultra-low Mn material

FS9 Ferrite-type special stainless steel

(Blank) SUS316L single-melt

◆Inner Surface Treatment

UP UP Treatment (Fujikin proprietary surface treatment)*


PS Cr₂O₃ Treatment

* As UP Treatment is standard for SS316LM materials, it is not shown as an option.

You can download the latest catalogue from "<http://www.fujikin.co.jp/go/c72001e>"


(Unit : mm)

Ultra-Compact Auto-Weld Fitting - Elbow




ϕD Nom.	$\phi D1$	L	L1	A	B	C	Part Number
6.35	4.4	10.3	6.35	8	7.9	7.9	UJL-6.35M-AW-S
9.52	7.4	11.9	6.35	11.1	11.1	11.1	UJL-9.52M-AW-S
12.7	10.3	13.5	6.35	14.3	14.3	14.3	UJL-12.7M-AW-S

Ultra-Compact Auto-Weld Fitting - Reducing Elbow




ϕD Nom.	$\phi D1$	$\phi D2$	$\phi D3$	L	L1	A	B	C	Part Number
9.52	6.35	7.4	4.4	11.9	6.35	11.1	11.1	11.1	UJL-9.52M×6.35M-AW-S
12.7	6.35	10.3	4.4	13.5	6.35	14.3	14.3	14.3	UJL-12.7M×6.35M-AW-S
12.7	9.52	10.3	7.4	13.5	6.35	14.3	14.3	14.3	UJL-12.7M×9.52M-AW-S

Ultra-Compact Auto-Weld Fitting - Tee

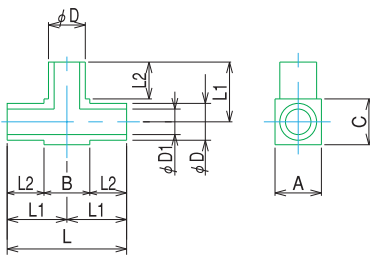

ϕD Nom.	$\phi D1$	L	L1	L2	A	B	C	Part Number
6.35	4.4	20.6	10.3	6.35	8	7.9	7.9	UJT-6.35M-AW-S
9.52	7.4	23.8	11.9	6.35	11.1	11.1	11.1	UJT-9.52M-AW-S
12.7	10.3	27	13.5	6.35	14.3	14.3	14.3	UJT-12.7M-AW-S

Ultra-Compact Auto-Weld Fitting - Reducing Tee

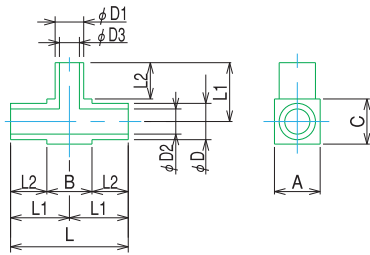


ϕD Nom.	$\phi D1$	$\phi D2$	$\phi D3$	L	L1	L2	A	B	C	Part Number
9.52	6.35	7.4	4.4	23.8	11.9	6.35	11.1	11.1	11.1	UJT-9.52M×6.35M-AW-S
12.7	6.35	10.3	4.4	27	13.5	6.35	14.3	14.3	14.3	UJT-12.7M×6.35M-AW-S
12.7	9.52	10.3	7.4	27	13.5	6.35	14.3	14.3	14.3	UJT-12.7M×9.52M-AW-S




(Unit : mm)

Ultra-Compact Auto-Weld Fitting - Cross




ϕD Nom.	$\phi D1$	L	L1	L2	A	B	C	Part Number
6.35	4.4	20.6	10.3	6.35	8	7.9	7.9	UJX-6.35M-AW-S
9.52	7.4	23.8	11.9	6.35	11.1	11.1	11.1	UJX-9.52M-AW-S
12.7	10.3	27	13.5	6.35	14.3	14.3	14.3	UJX-12.7M-AW-S

Ultra-Compact Auto-Weld Fitting - Tribow

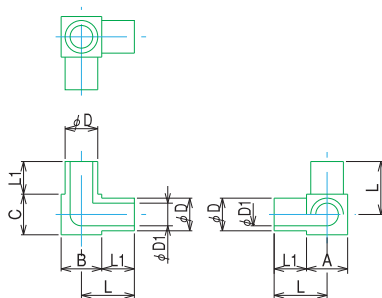


ϕD Nom.	$\phi D1$	L	L1	A	B	C	Part Number
6.35	4.4	10.3	6.35	7.9	7.9	7.9	UJLT-6.35M-AW-S
9.52	7.4	11.9	6.35	11.1	11.1	11.1	UJLT-9.52M-AW-S
12.7	10.3	13.5	6.35	14.3	14.3	14.3	UJLT-12.7M-AW-S

Ultra-Compact Auto-Weld Fitting - Reducer



ϕD Nom.	$\phi D1$	$\phi D2$	$\phi D3$	L	L1	Part Number
9.52	6.35	7.4	4.4	16	6.35	UJS-9.52M×6.35M-AW-S
12.7	6.35	10.3	4.4	16	6.35	UJS-12.7M×6.35M-AW-S
12.7	9.52	10.3	7.4	16	6.35	UJS-12.7M×9.52M-AW-S


Auto-Weld Fitting - Elbow



ϕD Nom.	$\phi D1$	L	L1	A	Part Number
6.35	4.4	25	19.05	11.1	UJL-6.35M-AW
9.52	7.4	25	19.05	11.1	UJL-9.52M-AW
12.7	10.3	29	19.05	17.2	UJL-12.7M-AW


(Unit : mm)

Auto-Weld Fitting - Reducing Elbow




φ D Nom.	φ D1	φ D2	φ D3	A	L	L1	L2	Part Number
9.52	6.35	7.4	4.4	11.1	25	25	19.05	UJL-9.52M×6.35M-AW
12.7	6.35	10.3	4.4	17.2	29	29	19.05	UJL-12.7M×6.35M-AW
12.7	9.52	10.3	7.4	17.2	29	29	19.05	UJL-12.7M×9.52M-AW

Auto-Weld Fitting - Tee




φ D Nom.	φ D1	A	L	L1	L2	Part Number
6.35	4.4	11.1	50	25	19.05	UJT-6.35M-AW
9.52	7.4	11.1	50	25	19.05	UJT-9.52M-AW
12.7	10.3	17.2	58	29	19.05	UJT-12.7M-AW

Auto-Weld Fitting - Reducing Tee



φ D Nom.	φ D1	φ D2	φ D3	A	L	L1	L2	Part Number
9.52	6.35	7.4	4.4	11.1	50	25	19.05	UJT-9.52M×6.35M-AW
12.7	6.35	10.3	4.4	17.2	58	29	19.05	UJT-12.7M×6.35M-AW
12.7	9.52	10.3	7.4	17.2	58	29	19.05	UJT-12.7M×9.52M-AW


Auto-Weld Fitting - Reducing Straight



φ D Nom.	φ D1	φ D2	φ D3	L	L1	Part Number
9.52	6.35	7.4	4.4	40	19.05	UJS-9.52M×6.35M-AW
12.7	6.35	10.3	4.4	40	19.05	UJS-12.7M×6.35M-AW
12.7	9.52	10.3	7.4	40	19.05	UJS-12.7M×9.52M-AW

OPTIONS

Auto-Weld Fitting - Special Elbow




φ D Nom.	φ D1	L	L1	L2	L3	A	Part Number
6.35	4.4	25	21	10.35	6.35	8	UJL-6.35M-L×S-AW-316LM



OPTIONS


(Unit : mm)

Auto-Weld Fitting - Special Tee




φD Nom.	φD1	L	L1	L2	L3	L4	A	Part Number
6.35	4.4	20.7	10.35	6.35	25	21	8	UJT-6.35M-S×L-AW-316LM

Auto-Weld Fitting - Special Tee




φD Nom.	φD1	L	L1	L2	L3	L4	A	Part Number
6.35	4.4	50	25	21	10.35	6.35	8	UJT-6.35M-L×S-AW-316LM

Auto-Weld Fitting - Elbow (1/8" OD)

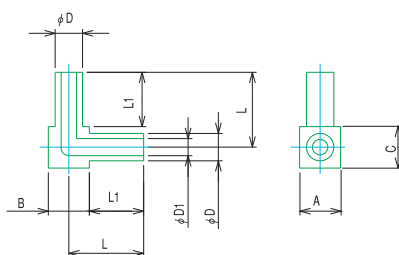


φ Nom.	φD1	L	L1	A	B	C	Part Number
3.2	1.8	8.75	6.35	5	4.8	4.8	UJL-3.2M-AW-S-EAJ

Auto-Weld Fitting - Tee (1/8" OD)



φ Nom.	φD1	L	L1	L2	A	B	C	Part Number
3.2	1.8	17.5	8.75	6.35	5	4.8	4.8	UJT-3.2M-AW-S-EAJ

Ultra-Compact Auto-Weld Fitting - Reducer (1/8" OD)

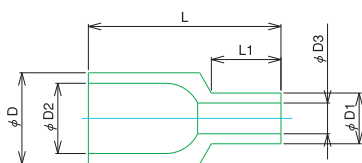

φD Nom.	φD1	φD2	φD3	L	L1	Part Number
6.35	3.2	4.4	1.8	16	6.35	UJS-6.35M×3.2M-AW-S-EAJ

Fujikin[®]



Fujikin[®] Carp[®] Group

URL <http://www.fujikin.co.jp/> E-mail info@fujikin.co.jp



The Year 2005
The 1st Monozukuri (manufacturing)
Nippon Grand Awards
: Excellence Prize